

heat wagon



342 N. Co. Rd. 400 East
Valparaiso, IN 46383

219-464-8818 • 888-432-8924 • Fax 800-255-7985

FN20 • FN42 • UB18

FN20 SPECIFICATIONS

Rating5,000 CFM
Type20" diameter direct drive
Electrical Requirements115 Volt 7 Amps
Weight74 lbs.
Dimension20"D x 23"W x 27"H
Motor1/2 HP/TEAO 1725 RPM

FN42 SPECIFICATIONS

Rating14,000 CFM at 550 RPM
Type42" diameter belt driven
Electrical Requirements115 Volt 1Ø 15 Amps
Weight210 lbs.
Dimension26"D x 50"W x 51"H
Motor1 HP/TEAO 1725 RPM

UB18 SPECIFICATIONS


Rating5,000 CFM of free air
Type18" diameter
5 blade direct drive
Electrical Requirements115 Volt 1Ø 15 Amps
Weight108 lbs.
Dimension26"L x 21 1/2"W x 26"H
Motor1 HP/TEAO 1725 RPM



FN20



FN42

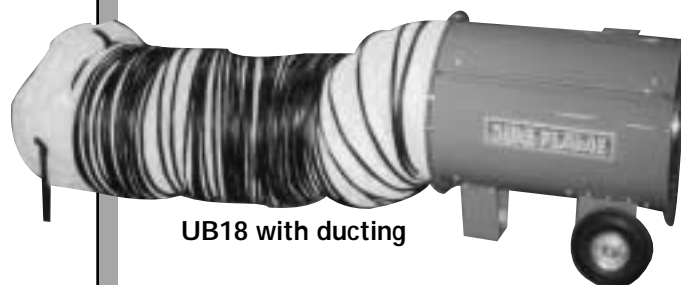

UB18 with ducting

Air Movers for Warm
or Cold Air Circulation

FN20 Features

- Built-in carrying handles
- On/off switch
- Rugged steel housing and screen construction
- Stand along unit or easily stackable
- 14 gauge HD cord with molded plug

FN42 Features

- Adjusts to seven different airflow directions
- Eye hooks for mechanical lifting
- On/off switch
- Rugged steel housing and screen construction
- Wheels and a built-in moving handle

UB18 Features

- Ductable at either the inlet or blower side
- Can circulate fresh air or remove polluted air
- Lifting bars
- On/off switch
- Rugged steel housing and screen construction
- Stand along unit or easily stackable
- Wire fan guards at both ends
- 14 gauge 3 wire cord with molded plug

Available as an explosion proof model.

www.heatwagon.com