




## **TELESCOPIC BOOM LIFT**

www.atsequipment.com

# T SERIES

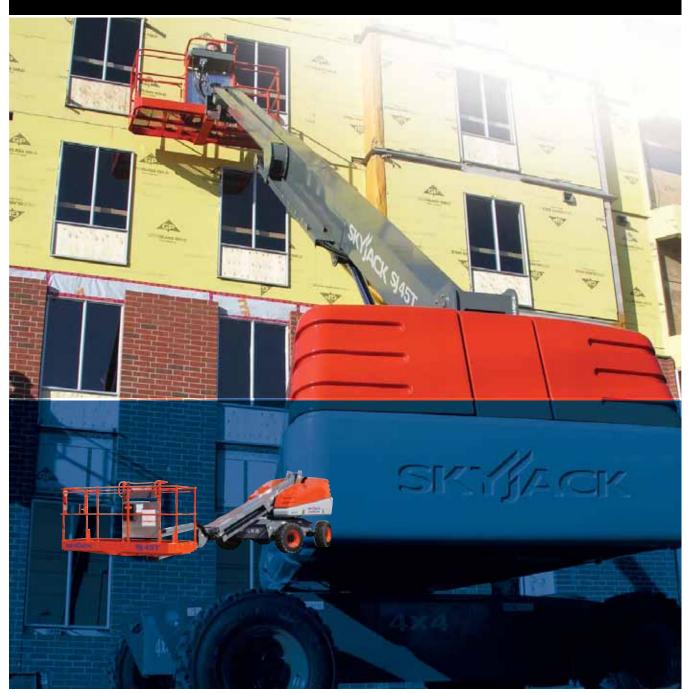

ATS EQUIPMENT INC.

**Construction Equipment & Supplies** 


**Rentals • Sales • Service** 

BOSTON, MA (617) 825-3600 AUBURN, MA (508) 832-8500 REHOBOTH,MA (508) 379-6200

CANDIA, NH (603) 483-2100

### TELESCOPIC BOOM LIFT - T SERIES

Specifications	SJ 40T
Work Height	46' 7"
Platform Height	40' 7"
Horizontal Reach	34'
Platform Size	36" x 96"
Stowed Width	90"
Tailswing	37"
Stowed Height	94"
Stowed Length	25'5"
Wheelbase	96"
Ground Clearance	11"
Platform Rotation	170°
Jib Length	-
Jib Range +/-	-
Weight	14,900 lbs
Gradeability - 4WD	45%
Turning Radius (Inside) - 4WD	84"
Turning Radius (Outside) - 4WD	198"
Axle Oscillation	8"
Drive Speed (stowed)	4.5 mph
Drive Speed (raised)	0.5 mph
Capacity	650 lbs
Maximum # of Persons	2



SJ 40T REACH DIAGRAM



### STANDARD FEATURES

- Drivable at full height
- Axle based 4WD
- "Detroit Locker" type rear differential and limited slip front differential
- Oscillating axle
- Wet disc SAHR brakes (rear axle)
- 48hp Deutz diesel engine
- Swing out engine tray
- Swing up fiberglass cowlings
- 360° continuous turret rotation
- Direction sensing drive and steer controls
- Proportional controls
- Relay based control system
- Color coded and numbered wiring system
- 45% gradeability
- 12 x 16.5 grip lug air-filled tires
- 110V AC outlet on platform with GFI
- Tilt alarm with drive cut-out
- All motion alarm
- Operator horn
- Modular platform railing system
- Spring hinged gate
- · Lanyard attachment points
- Tie down/lifting lugs

#### ADDED ITEMS‡

- Cold weather start kit (Diesel only)
- Diesel scrubber
- Tire sealant (in standard air-fi