



# ROCK DRILLS

AVAILABLE FOR RENT AT



www.atsequipment.com

## ROCK DRILLS AND SINKER DRILLS

### DRILLING RATES IN HARD ROCK

Chicago pneumatic sinker drills are ideal for a range of drilling applications, their stream-lined design incorporates smooth contours, a side exhaust and A "flat back" that makes them easy to handle in quarry, mine, drilling and doweling work. The design also provides a main valve and cylinder-porting Concept that helps maintain constant drilling speed throughout a long service life. Working parts are continually protected with an effective lubrication system. Standard and silenced versions are available in a range of weights and sizes to fit and requirement.

### Drilling rates in hard rock and concrete (use as guide only)

MODEL	DRILL RATE (IN/MIN)	HOLE DIAMETER
CP 0022	6.0	1 5/8"
CP 0032	9.0	1 3/4"
CP 0069	10.2	1 3/4"

### All Models

- Forged steel housings withstand rugged use
- Cushioned piston reduces shock
- Multi-position throttle for easy starting of holes
- Blower lever for deep hole cleaning on CP 0032 and CP 0069
- Integral oil provides continuous lubrication
- 3/4" (NPTF) air inlet swivel improves manoeuvrability
- Double grip handles


### Vibration reduced options

- CP 0022, CP 0032A, and CP 0069 be equipped with a vibration reduced handle (order kit: R154915)

MODEL	PART NUMBER	NET WEIGHT (LB)	OVERALL LENGTH WITH RETAINER (IN)	STANDARD CHUCK HEX. SIZE (IN)
<b>CP 0022: 30-POUND CLASS—AIR CONSUMPTION AT 90PSI: 56 CFM</b>				
CP 0022	T022114	28	19 7/8	7/8 C 3 1/4"
<b>CP 0032: 45- TO 50-POUND CLASS—AIR CONSUMPTION AT 90PSI: 103CFM</b>				
CP0032A.87	T022318	54	22	7/8 X 3 1/4"
CP 0032A.87A	T022117	54	23	7/8 X 4 1/4"
CP 0032A-1	T022319	54	23	1 X 4 1/4"
<b>CP 0069: 60-POUND CLASS—AIR CONSUMPTION AT 90PSI: 130CFM</b>				
CP 0069	T006661	64	24 1/4"	7/8 X 4 1/4"
CP 0069	T022259	64	24 1/4"	1 X 4 1/4"


### CP 0022: 30-POUND CLASS

The CP 0022 provides drilling capability for holes up to 1 3/4" diameter, 8 feet deep. This is the ideal choice where a lightweight and powerful tool is needed in public works, utilities and drilling from scaffolding. Also the correct choice where air supply is limited. A spring Retainer is used for quick steel changes. CP 0022 can also be equipped with 3/4" X 4 1/4" bushing and spring

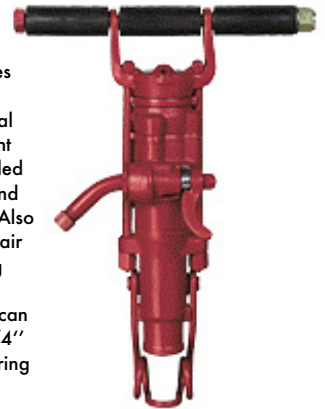

### CP 0032A: 45- TO 50-pound class

Choose the CP 0032A for holes up to 2" Diameter and 10 feet deep. A top performer in its class, the CP 0032A is highly effective in general excavation work, quarry drilling, bench mining and other jobs requiring a sinker drill in the 45-pound class. The tool's durable "beavertail" retainer helps it deliver increased contact and reduces collar wear.

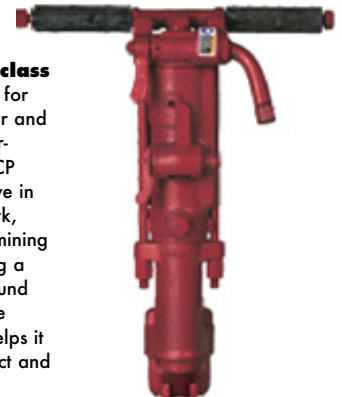

### CP 0069: 60-pound class

The CP 0069 is suited for drilling 2 1/2" diameter holes 20 feet deep. The heavy-duty CP 0069 sinker is a hard-hitting tool that combines high drilling speed with excellent hole cleaning ability. Its trouble free "beavertail" retainer Provides greater front-end durability and increased collar contact to reduce wear.



ATS EQUIPMENT INC. Construction Equipment & Supplies Rentals • Sales • Service

BOSTON, MA  
(617) 825-3600

AUBURN, MA  
(508) 832-8500

CANDIA, NH  
(603) 483-2100